


# Precision Punch & Plastics

## Ejector Pins: Straight Type

**Straight Style  
Ejector Pins**

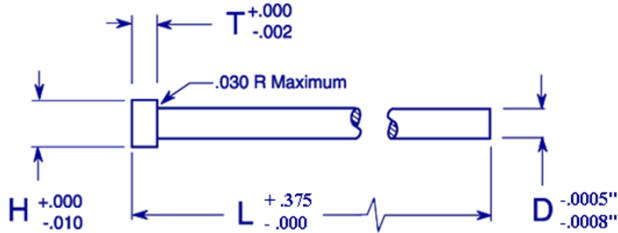

**Material:** H-13 Hotwork Die Steel  
thermal & shock resistant  
**Core:** Hardened throughout 41-45 RC  
**Surface:** Ion Nitrided to 65-74 RC  
**OD's :** Precision ground surface 5-10 rms

Part Number	L	D	H	T	Part Number	L	D	H	T
	Standard Length	Nominal Pin Dia.	Head Diameter	Head Thickness		Standard Length	Nominal Pin Dia.	Head Diameter	Head Thickness
25E062 -6	6	1/16	1/4	1/8	25E281 -6	6	9/32	7/16	1/4
25E062 -10*	10				25E281 -10*	10			
25E078 -6	6	5/64	1/4	1/8	25E281 -14*	14			
25E078 -10*	10				25E312 -6	6	5/16	1/2	1/4
25E093 -6	6	3/32	1/4	1/8	25E312 -10*	10			
25E093 -10*	10				25E312 -14*	14			
25E109 -6	6	7/64	1/4	1/8	25E343 -6	6	11/32	9/16	1/4
25E109 -10*	10				25E243 -10*	10			
25E125 -6	6	1/8	1/4	1/8	25E243 -14*	14			
25E125 -10*	10				25E375 -6	6	3/8	5/8	1/4
25E125 -14*	14				25E375 -10*	10			
25E140 -6	6				9/64	1/4			
25E140 -10*	10	25E437 -6	6	7/16			11/16	1/4	
25E140 -14*	14	25E437 -10*	10						
25E156 -6	6	5/32	9/32		3/8	25E437 -14*			14
25E156 -10*	10			25E468 -6		6	15/32	3/4	1/4
25E156 -14*	14			25E468 -10*		10			
25E187 -6	6	3/16	3/8	3/16	25E468 -14*	14			
25E187 -10*	10				25E500 -6	6	1/2	3/4	1/4
25E187 -14*	14				25E500 -10*	10			
25E203 -6	6	13/64	3/8	3/16	25E500 -14*	14			
25E203 -10*	10				25E625 -6	6	5/8	7/8	1/4
25E203 -14*	14				25E625 -10*	10			
25E218 -6	6	7/32	13/32	3/16	25E625 -14*	14			
25E218 -10*	10				25E750 -6	6	3/4	1	1/4
25E218 -14*	14				25E750 -10*	10			
23E234 -6	6	15/64	13/32	3/146	25E750 -14*	14			
25E234 -10*	10				25E875 -6	6	7/8	1-1/8	1/4
25E234 -14*	14				25E875 -10*	10			
25E250 -6	6	1/4	7/16	3/16	25E875 -14*	14			
25E250 -10*	10				25E1000 -6	6	1	1-1/4	1/4
25E250 -14*	14				25E1000 -10*	10			
25E265 -6	6	17/64	7/16	1/4	25E1000 -14*	14			
25E265 -10*	10								
25E265 -14*	14								

\* +.005 oversize diameter pins available  
Lengths 4",18",25",36", available some sizes.